



BCS-HOA-2


Front View



Top View

BCS-HOA-4

Front View

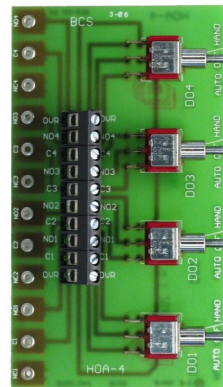

Top View

DESIGNED FOR:

- IA-ASD Product Line
- IA-LON Product Line

BENEFITS & FEATURES:

- Manual Override of individual output channels
- Eliminates the need for interface software when checking out / trouble shooting end devices.

HOA SERIES:

The HOA Series of Digital Output Override Cards are available in two varieties: two and four channel versions. These cards allow for manual override switching of a controller's output channel. The card was designed for the TAC Network 8000 Microzone II Controller but may be applied to any controller via interposing terminals. The HOA (2/4) allows an operator to manually select On-Off-Auto positions for a particular piece of equipment. Monitoring of its own override status is an added feature. Terminals OVR and OVR provide a normally closed contact which opens when any switch is placed out of the Auto position.

SPECIFICATIONS:

Operating Temperature: +32 to +122 Degrees F

Contact Rating: Up to 5 Amps at 250 VAC

- * Not to exceed Microzone Controller rating of 120 VA. at 120VAC Pilot Duty and 30 VA at 24 VAC Pilot Duty

